



SO2-BE/SO2-BE+ Sulfur Dioxide Sensor, High Concentration

The SO2-BE sensor is a PPM sensor that is designed for a broad variety of applications and instrumentation including portable gas detectors and fixed gas detection systems for industrial safety, environmental air quality and process control. This product is available in our standard format (SO2-BE) and with our patented Integrated Smart Technology (SO2-BE+) that has an IST board with a memory chip and temperature sensor integrated in the sensor. The + sensors store specific calibration, specification, and identification data on every sensor allowing plug and play operation. The on-board temperature sensor improves the accuracy and simplicity of temperature compensation algorithms.

SO2-BE Sulfur Dioxide Sensor, High Concentration – 3-Electrode

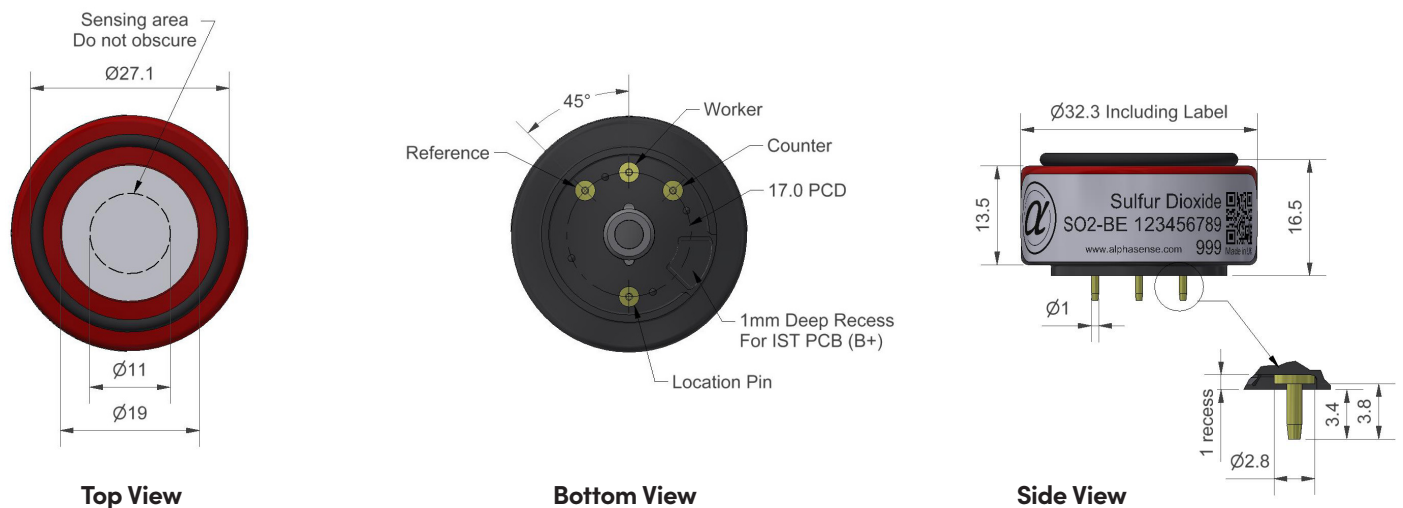

SO2-BE+ Sulfur Dioxide Sensor, High Concentration – 3-Electrode (with Integrated Smart Technology)

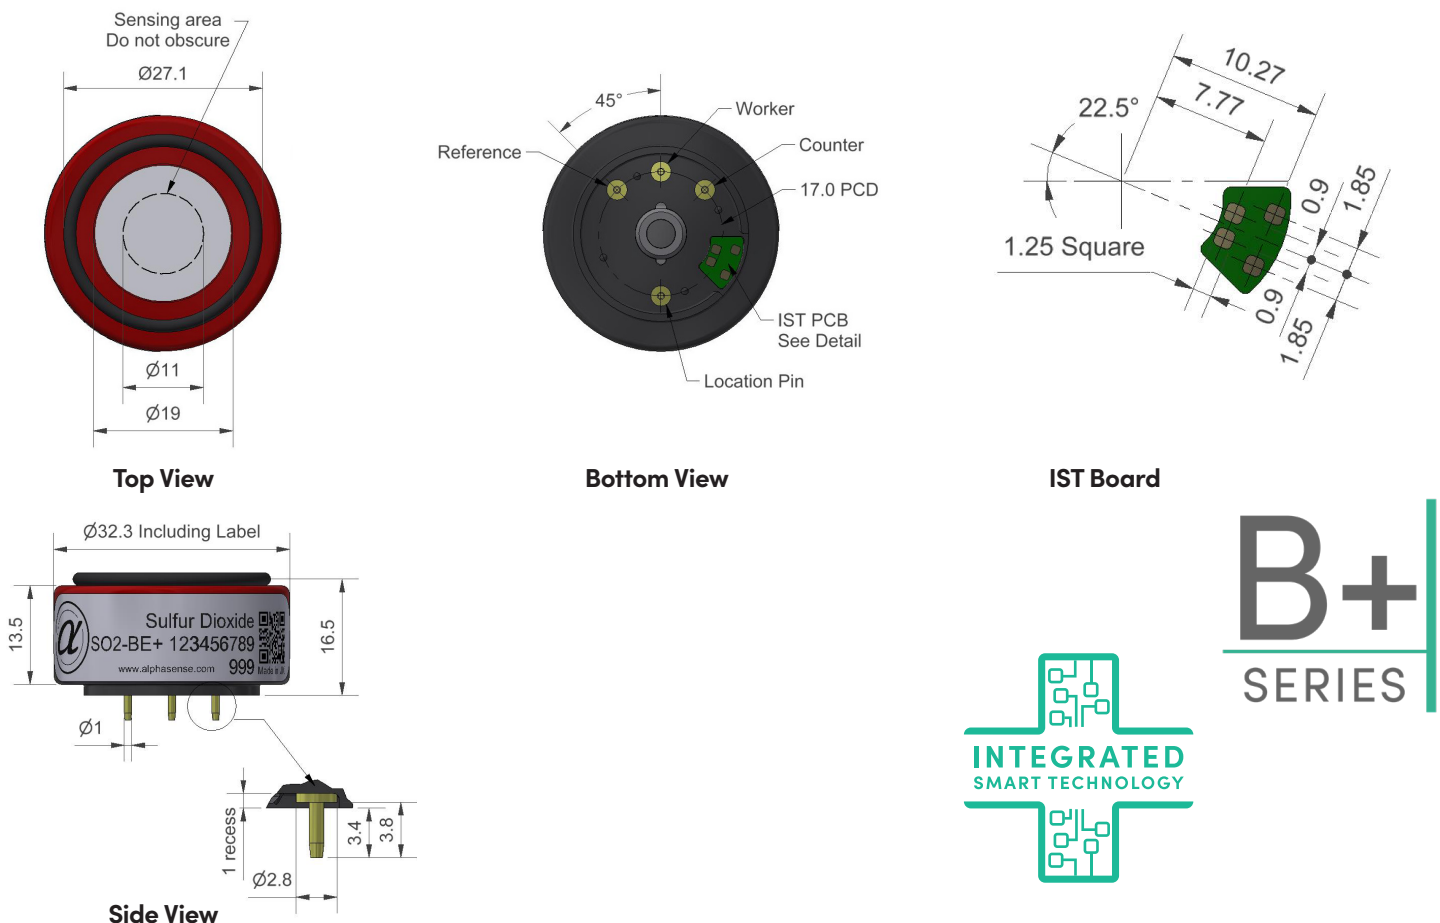

Dimensions are in millimetres (± 0.15 mm).

Sensor Data

Performance	Sensitivity	nA/ppm in 20ppm SO ₂	70 to 100
	Response time	t ₉₀ (s) from zero to 20ppm SO ₂	< 30
	Zero current	ppm equivalent in zero air	< ±2
	Resolution	RMS noise (ppm equivalent)	< 2
	Range	ppm limit of performance warranty	2000
	Linearity	ppm error at full scale, linear at zero and 20ppm SO ₂	nd
	Overgas limit	maximum ppm for stable response to gas pulse	10,000
Lifetime	Zero drift	ppm equivalent change/year in lab air	nd
	Sensitivity drift	% change/year in lab air, monthly test	nd
	Operating life	months until 80% original signal (24 month warranted)	> 24
Environmental	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 20ppm	80 to 90
	Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 20ppm	95 to 105
	Zero @ -20°C	ppm equivalent change from 20°C	< ±1
	Zero @ 50°C	ppm equivalent change from 20°C	< -1 to 10
Cross sensitivity	Filter capacity	ppm·hrs H ₂ S	4000
	H ₂ S sensitivity	% measured gas @ 20ppm H ₂ S	< 2
	NO ₂ sensitivity	% measured gas @ 10ppm NO ₂	< -180
	Cl ₂ sensitivity	% measured gas @ 10ppm Cl ₂	< 35
	NO sensitivity	% measured gas @ 50ppm NO	< -30
	CO sensitivity	% measured gas @ 400ppm CO	< 8
	H ₂ sensitivity	% measured gas @ 400ppm H ₂	< 1.5
	C ₂ H ₄ sensitivity	% measured gas @ 400ppm C ₂ H ₄	< 0.1
	NH ₃ sensitivity	% measured gas @ 20ppm NH ₃	< 0.1
Key specifications	Temperature range	°C	-30 to 50
	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous	15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)	6
	Load resistor	Ω (recommended)	10 to 47
	Weight	g	< 13

Figure 1 Sensitivity Temperature Dependence

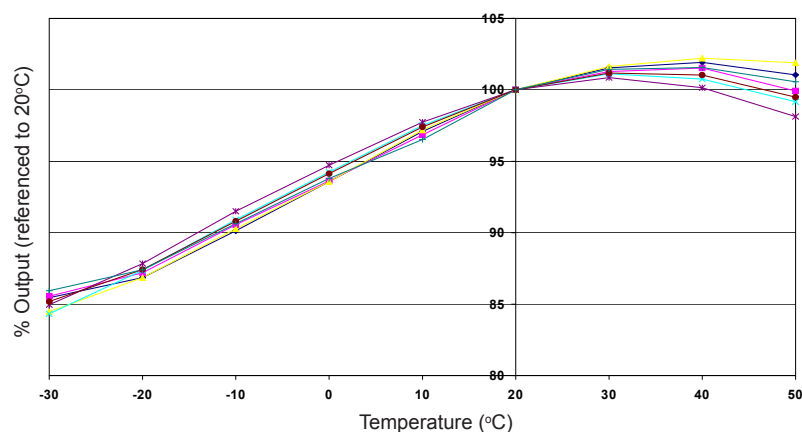


Figure 1 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors.

Figure 2 Zero Temperature Dependence


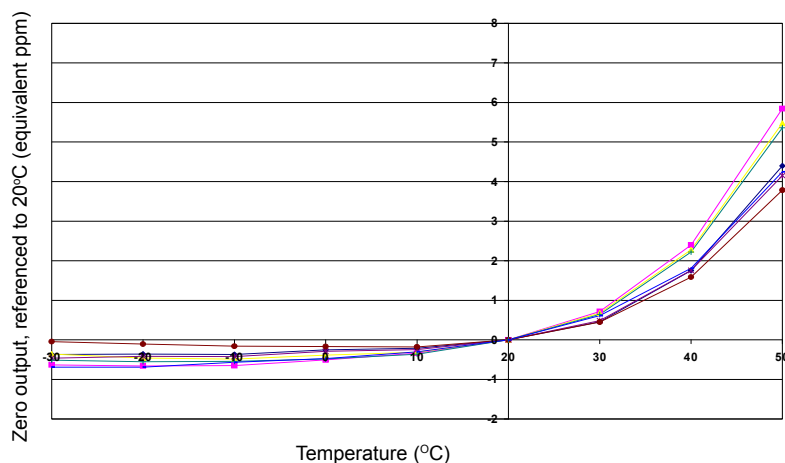


Figure 2 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent, referenced to zero at 20°C.

This data is taken from a typical batch of sensors.

Figure 3 Response breath test

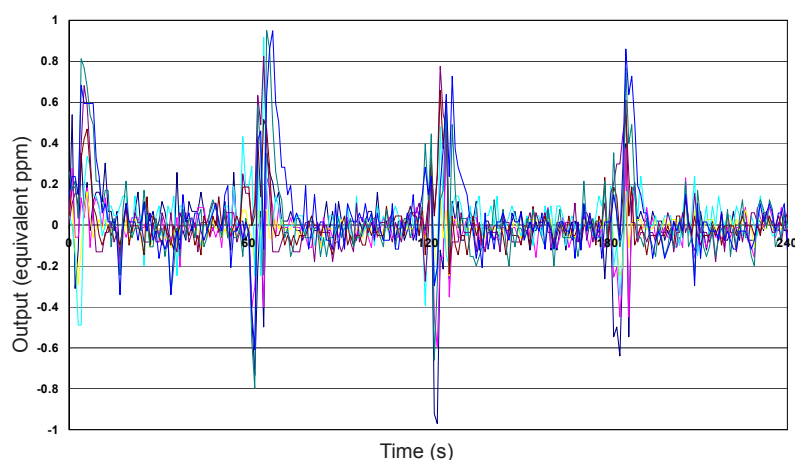

Simply breathing on a sensor causes both temperature and humidity transients.

The SO₂-BE recovers rapidly, returning to zero after four consecutive breaths.

IST Board Data

Interface

Communication Bus	Compatible with the 400 kHz I ² C protocol
Max. Bus Speed	Up to 1 MHz
Input Logic Levels	High (Recessive) < 2.3 V Low (Dominant) < 0.2 V
Absolute Max. Input Signal	3.6 V

Electrical

Supply Voltage Range	1.7 V to 3.6 V
Supply current – Stand-By	< 5 µA
Supply current – Operating	< 0.15 mA (temperature reading only) < 2.15 mA (temperature reading + memory reading/writing)
Power Supply Conditioning	Built-In 100 nF decoupling capacitor
ESD Protection	4 kV (human body model) – Enhanced ESD / Latch-Up protection
Bus Pins Input Capacitance	15 pF max.

Performance

Operational Temperature	–40 °C to +85 °C
Temperature Sensor Accuracy	±1°C (–0°C to +70°C)
Memory Data Retention	> 200 years
Memory Write Cycles	> 4,000,000

Data & Communication

Memory IC & I2C Address	M24128X-FCU Device Address: R – 0xA0 / W – 0xA1
Temperature IC & I2C Address	MAX31875R0TZS+T Device Address: R – 0x90 / W – 0x91
Product Data Start Address	0x0900
Calibration Data Start Address	0x0B00
User Data Area	0x0D00 – 0x18FF (3,072 Bytes)
CRC Polynomial	0x 01 04C1 1DB7
Digital Signature Algorithm	SHA-256

Factory-populated data

Product Data

Data Format Version
Customer (OEM) ID
Product ID
Type of Sensor / Target Gas
Sensor Serial Number
End of Storage Period Date
Sensor Replacement Date
Product Data Checksum
Alphasense Digital Signature
Customer Digital Signature

Calibration

Calibration Data Units
Zero (clean dry air) Output
Calibration Span
Calibration Output
Sensitivity
Calibration Date
Calibration Data Checksum
Calibration Data Signature

Sensor Specification

Over-gas limit
Concentration Range
Temperature Range Low
Temperature Range High
Humidity Range Low
Humidity Range High
Pressure Range Low
Pressure Range High
Specification Checksum

15,000+ locations

Customer Specific

Custom Parameters
Re-Calibration Due Date
Operational Limits:
Low | High | STEL | TWA
Next Bump Test Due Date
User Data Area

*Note: Above 85% rh and 40°C a maximum continuous exposure period of 10 days is warranted. Where such exposure occurs the sensor will recover normal electrolyte volumes when allowed to rest at lower % rh and temperature levels for several days.

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions. NOTE: All sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within.(©ALPHASENSE LTD) Doc. Ref. SO2-BE/FEB24